

01 Data Sheet for Wall-mounted LCD Screen




Panel	Display Size (inch)	21.5	32	43	49	55	65
	Resolution	1920*1080					
	Display Area (mm)	476.8* 268.3	700.5* 394.8	941.2* 529.4	1073.5* 603	1209.6* 680.4	1428.4* 803.5
	Aspect Ratio	16:9					
	Brightness (cd/m2)	250	300	300	350	350	350
	Colour	16.7M					
	Viewing Angle	178°					
	Contrast Ratio	1000:1	1000:1	1000:1	1000:1	5000:1	5000:1
Touch Screen	Type	Pro-Cap touch screen film 10 points					
Android Media Player	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JP G, GIF, BMP, PNG)					
	Media Resolution	3840*2160					
	External Memory	8G SD card (up to 32G)					
	Processor	Rockchip® 3368 (1.8GHz, octa core)					
	RAM	2G					
	Flash	8G EMMC					
	USB	USB2.0 HOST (x3)					
	LAN	10M/100M Ethernet (Network version screen only)					
	Wi-Fi	802.11b/g/n Ethernet (Network version screen only)					
	OS	Android 5.1.1					
Others	Loud Speaker	5W.8Q (2 sets)					
	Input	AC100~240V (50Hz/60Hz)					
Environmental	Operating Temperature	0° C-45° C					
	Storage Temperature	-30° C-55° C					
	Operating Humidity	10%-80%					
	Storage Humidity	5%~95%					

02 Data Sheet for Floor-standing LCD Screen



Panel	Display Size (inch)	43	49	55
	Resolution	1920*1080		
	Display Area (mm)	700.5*394.8	1073.5*603	1209.6*680.4
	Aspect Ratio	16:9		
	Brightness (cd/m2)	350	350	350
	Colour	16.7M		
	Viewing Angle	178°		
	Contrast Ratio	1000:1	1000:1	5000:1
Touch Screen	Type	Pro-Cap touch screen film 10 points		
Android Media Player	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)		
	Media Resolution	3840*2160		
	External Memory	8G SDcard(upto32G)		
	Processor	Rockchip® 3368 (1.8GHz, octa core)		
	RAM	2G		
	Tash	8G EMMC		
	USB	USB2.0 HOST (x3)		
	LAN	10M/100M Ethernet (Network version screen only)		
	Wi-Fi	802.11b/g/n Ethernet (Nehvork version screen only)		
	OS	Android 5.1.1		
Others	Loud Speaker	5W, 80 (2 sets)		
	Input	AC100~240V (50Hz~60Hz)		
Environmental	Operating Temperature	0 ° C~45 ° C		
	Storage T emperature	-30° C~55 ° C		
	Operating Humidity	10%-80%		
	Storage Humidity	5%-95%		
Accessories	Included	Ceiling mount bracket, Scheduling software, Remote control, Key, Power cable, SD card		

03 Data Sheet for Free-standing Kiosk

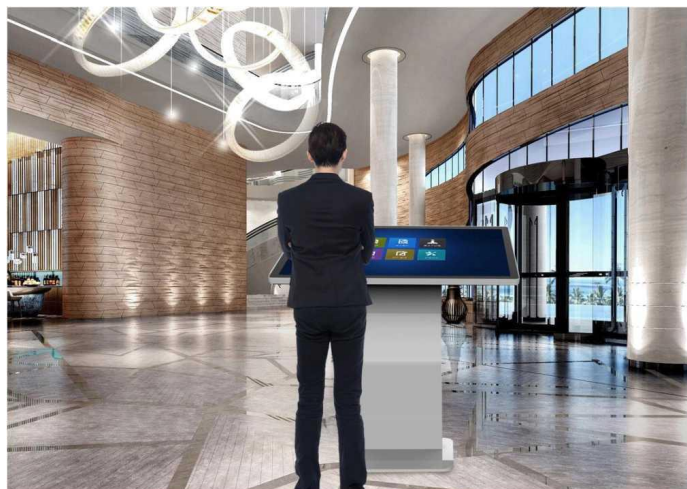

Panel	Display Size (inch)	43	49	55
	Resolution	1920*1080		
	Display Area (mm)	700.5*394.8	1073.5*603	1209.6*680.4
	Aspect Ratio	16:9		
	Brightness (cd/m2)	350	350	350
	Colour	16.7M		
	Viewing Angle	178°		
	Contrast Ratio	1000:1	1000:1	5000:1
Touch Screen	Type	Pro-Cap touch screen film 10 points		
Android Media Player	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)		
	Media Resolution	3840*2160		
	External Memory	8G SD card (up to 32G)		
	Processor	Rockchip® 3368 (1.8GHz, octa core)		
	RAM	2G		
	Flash	8GEMMC		
	USB	USB2.0 HOST (x3)		
	LAN	10M/100M Ethernet (Network version screen only)		
	Wi-Fi	802.11b/g/n Ethernet (Network version screen only)		
	OS	Android 5.1.1		
Others	Loud Speaker	5W, 8Q (2 sets)		
	Input	AC100-240V (50Hz-60Hz)		
Environmental	Operating Temperature	0° C~45 ° C		
	Storage Temperature	-30° C~55 ° C		
	Operating Humidity	10% >80%		
	Storage Humidity	5%-95%		
Accessories	Included	Way-finding upgrade, Remote control, Key, Power cable, SD card		